
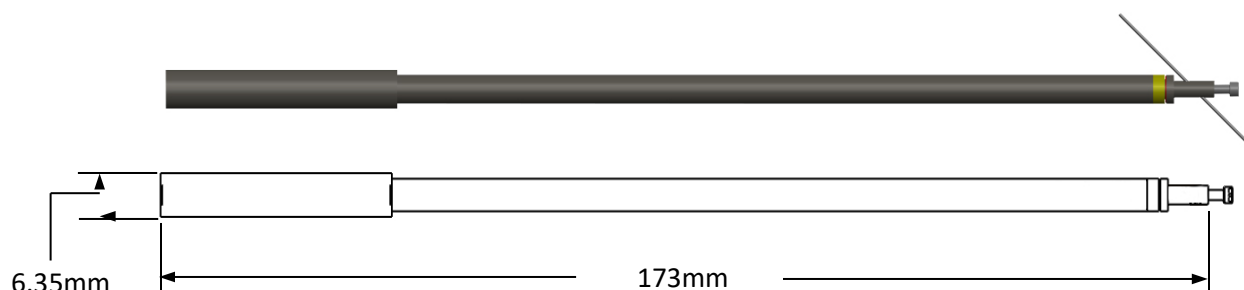


Signatone TRX Probe Holder

Very low-Noise probe holder ($\approx \pm 2 \text{ fA}$) when used with the triaxial chuck and in an electrically shielded environment. Designed for use with all Signatone Micropositioners and a variety of probe tips

The Signatone Triaxial Shielded probe tip holder includes a 60" Triax cable terminating in a Triax connector. Includes Screw-Lock probe tip mounting mechanism

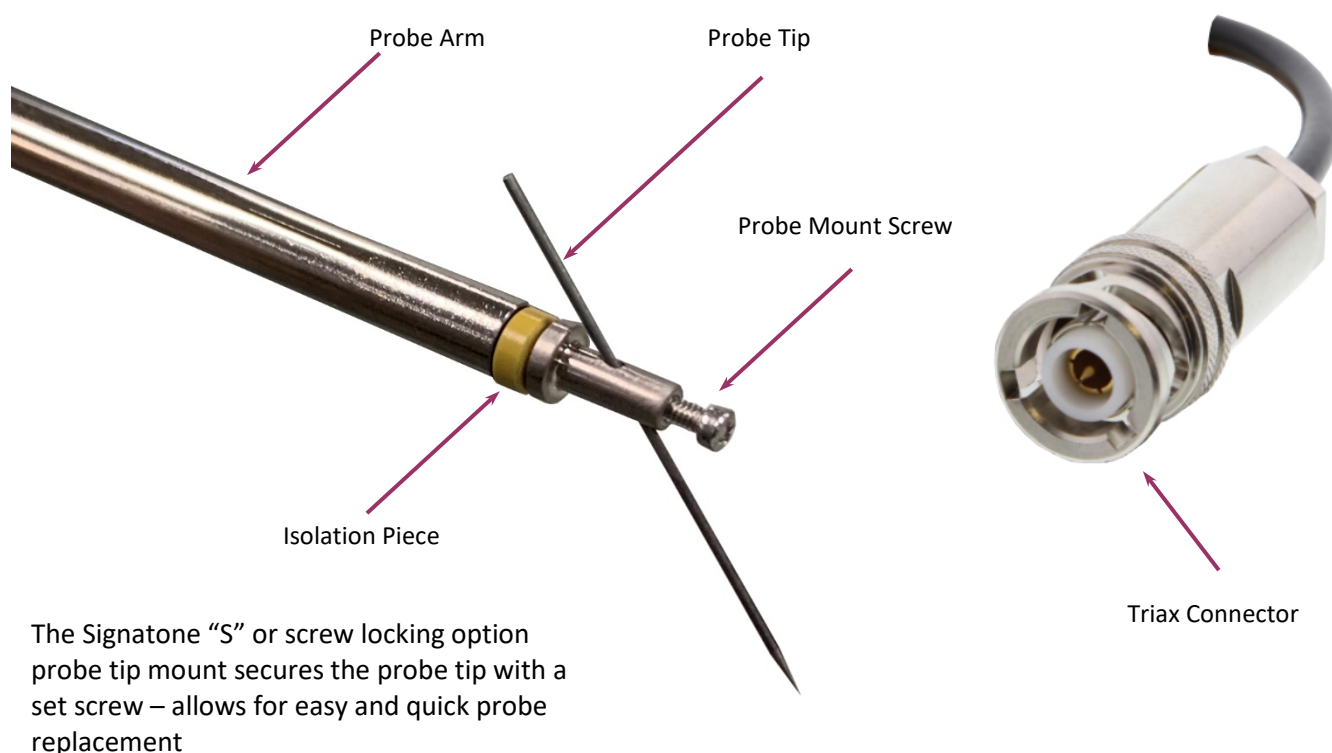

Ultra-Low Current and Full Range Thermal Probing

PART #	Material	Length	Probe Mount	Connection	Typical Use
TRX-L-S-60-#	Brass	173mm	Screw- Lock	Triax	$\pm 2 \text{ fA}$

❖ Model maker

Model maker : **TRX-#-#-##-#**

TRX	Triax Shielded probe holder
-S	Short arm – 2.5" (63.5mm)
-L	Long arm – 4" (101mm)
-S	Screw lock
-24	24" (0.6m) triax cable & connector
-60	60" (1.5m) triax cable & connector
-5	Mount for S-725P
-6	Mount for S-926P
-C	Mount for CAP946
-I	Mount for SP-100P or SP-150P



GRENOBLE - FRANCE

Tel : +33 (0)4 76 56 16 17

Email : contact@microworld.eu

www.microworld.eu