



Signatone TRX Probe Holder

Very low-Noise probe holder ($\approx \pm 2 \text{ fA}$) when used with the triaxial chuck and in an electrically shielded environment. Designed for use with all Signatone Micropositioners and a variety of probe tips

The Signatone Triaxial Shielded probe tip holder includes a 60" Triax cable terminating in a Triax connector. Includes Screw-Lock probe tip mounting mechanism

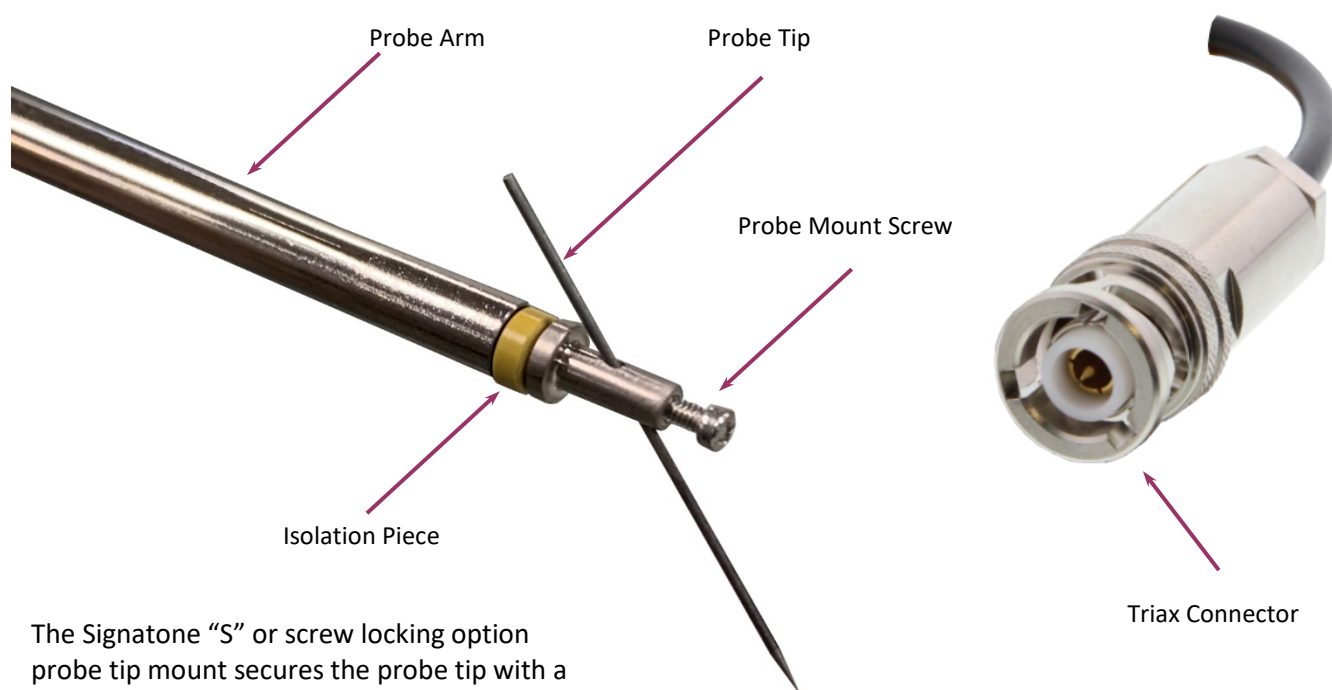

The Signatone "S" or screw locking option probe tip mount secures the probe tip with a set screw – allows for easy and quick probe replacement

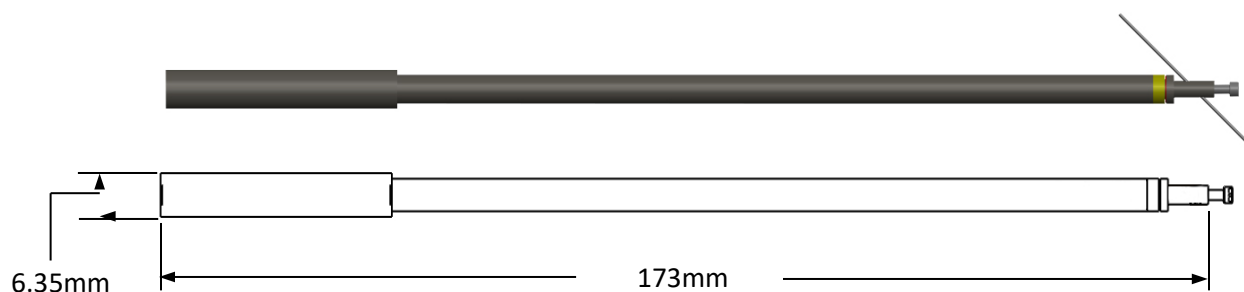

Ultra-Low Current and Full Range Thermal Probing

PART #	Material	Length	Probe Mount	Connection	Typical Use
TRX-L-S-60-#	Brass	173mm	Screw- Lock	Triax	$\pm 2 \text{ fA}$