


Signatone CM-170 200 mm Precision Manual Probe System

For Reliable, Accurate DC/CV/RF, and High-Power Test Measurements

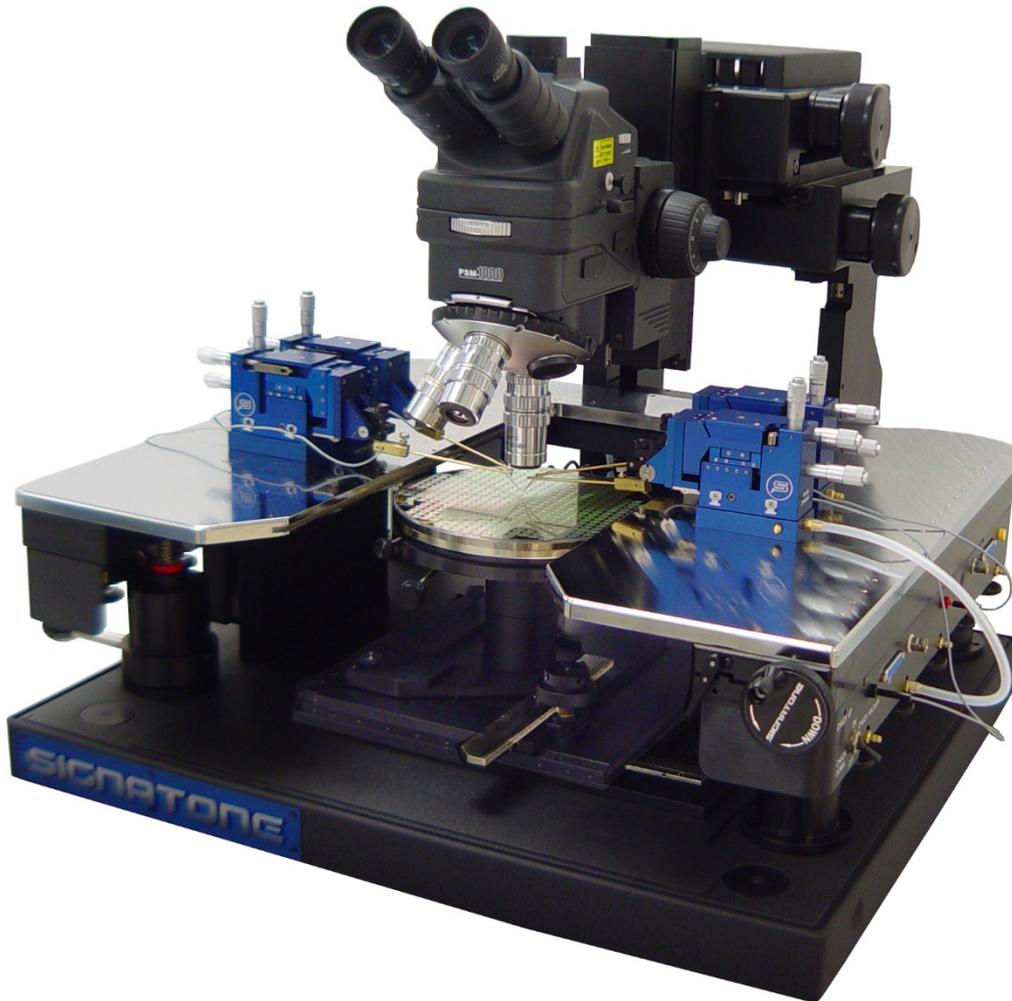

Designed for a Variety of On-Wafer Analytical Measurement Applications

- DC, CV/IV, pulsed –IV applications
- High Power Application up to 12KV /600A
- RF applications up to 110GHz 2 & 4 port setup
- Upgradable for mmW 110GHz -1.5THz 2-Port
- IC Design / test verification Ambient, +300°C
- Modular design for multiple applications

Ergonomics and Optional Configurations

- Ease of use / single-handed X-Y Stage knobs for quick movement (fine knob control*)
- Quick platen lift with adjustable platen separation
- Chuck rotation
- Chuck fine rotation and lock*
- Available in multiple configurations including a variety of chuck options, DC/RF/High Power Micro positioners, microscopes, camera's, PCB holders, and more.
- Optional Instrumentation racks, Vibration Isolation tables, Thermal chuck, and more.

❖ SPECIFICATIONS

Chuck XY Stage (Manual)

Travel Range (Standard)	203 mm x 203 mm (8" x 8")
Travel Resolution (Standard)	75 µm Per Degree of Knob Rotation
Travel Range (Fine)*	12mm x 12mm (0.5" x 0.5")
Travel Resolution (Fine)*	<1µm (0.001mm) @ 250µm/rev
Drive Mechanism	Coaxial Knob Gear Drive Stage

Chuck To Platen (Manual Adjust)

Separation (Quick Lift)	3.175mm (1/8")
Separation (Fine Lift)	38.1mm (1.5")

Chuck Theta Stage (Manual)

Theta Travel (Standard)	360°
Theta Travel (Fine)*	± 6.0°
Theta Resolution	1.5 x 10 ⁻⁵ gradient
Repeatability	< 1.5 µm
Theta Stage Drive	High Resolution Lead Screw

Manual Microscope Stage (linear)

Movement range	50mm X 50mm (2"x2")
Resolution	< 2µm (2 x 10 ⁻⁴ mils)
Scope lift	101 mm (4") Vertical Pneumatic (Manual Knob- optional)

❖ PROBE PLATEN

Specifications


Material	Nickel Plated Steel (Al optional)
Dimension	L = 580mm x W = 637mm x H = 12.7mm (See drawing)
Chuck to Thermal Shield Separation	Min. 2 mm (Variable Separation with Fine Platen Adjust)
Max. No of Micro Positioners	4x RF + 2x DC or 2x RF + 4 x DC or 4x RF + 4x DC or 10x DC
Quick Platen Lift Control (CVL)	Continuous Variable Lift (0 to 3.175 mm)
Contact Repeatability	< 1 µm (0.04 mils) by Manual Control
RF MicroPositioner mounting	Magnetic or Bolt Down
DC MicroPositioner mounting	Magnetic or Vacuum
Thermal Isolation (Optional)	Platen Temp = +15 °C to +40°C /chuck @ -60 °C to +300°C

Signatone Multi Benefit Ergonomically Correct Platen Adjust and Features:


- “Quick Lift” with CVL for easy probe to pad separation and alignment
- “Fine Adjust” for Probe card and variable Chucks and DUT thickness setup
- “Position Lock” allows for secure “lock” of user defined platen height setup
- “Thermal Isolation” maintains a safe temperature of probes and platen surface while chuck is at extreme temperatures (optional)




Platen “Quick Lift”

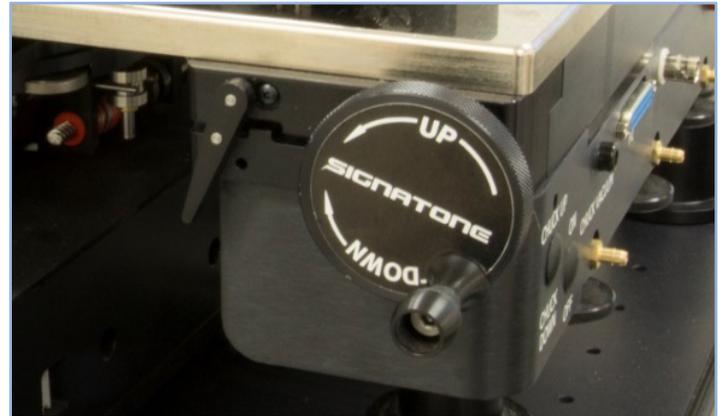

Platen “Fine Adjust” and
“Position Lock”

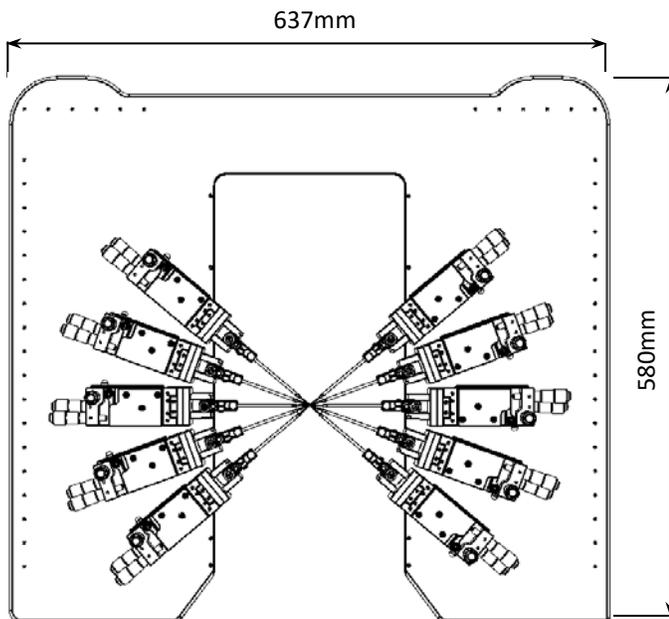

Sample4: Probe Configured with 10 DC Probes

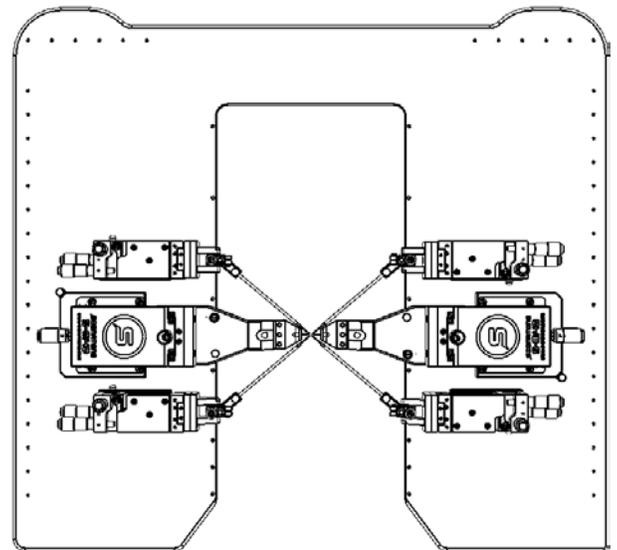

Sample2: Probe Configured with 2 RF + 4 DC Probes

❖ NON-THERMAL CHUCKS

Standard Wafer Chuck

Connectivity	Coax BNC (m)
Diameter	203 mm
Material	Nickel Plated Brass (gold optional)
Chuck surface	Zone selector knob with Peppered vacuum patterns
Vacuum hole pattern sections(diameter)	22mm, 50mm, 91mm, 135mm, 168mm
Vacuum actuation	Selector Knob allows individual activation of vacuum zones
Supported DUT sizes	25mm, 75mm, 100mm, 150mm, 200mm
Surface planarity	±6.5μ
Rigidity	<3μ / 10N at edge of the chuck

Electrical Specification (Coax)

Operation voltage	Designed for operation at -200V to + 200VDC
Maximum voltage between chuck top and GND	500 V DC
Isolation	> 150 GΩ

Wafer Chuck (Triaxial)

Connectivity	Triax (m)
Diameter	203 mm
Material	Gold Plated Brass
Chuck surface	Independent Vacuum zones with circular patterns
Vacuum hole pattern sections(diameter)	0mm, 65mm, 112mm, 162mm
Vacuum actuation	Multi-Zone Adjustable Control
Supported DUT sizes	3mm, 75mm, 125mm, 200mm
Surface planarity	± 5 μm
Rigidity	<3μ / 10N near at edge of the chuck

Electrical Specification (Triax)

Chuck isolation	Measured @ 10V DC
Force to guard	> 2 TΩ
Guard to shield	> 7 TΩ
Force to shield	> 15 TΩ

❖ SIGNATONE THERMAL CHUCKS

Typical Specifications of *Signatone* Thermal Technology

	200mm Standard Hot	200mm Hot/ Triax	200mm Hot/ 3kV Triax
Temperature Range	+25 °C to +300 °C	+25 °C to +200 °C	+25 °C to +200 °C
Connectivity	Coax (m)	Triax (m)	SHV Triax (m)
Temperature control method	Liquid Cooled / Resistance heater	Liquid Cooled / Resistance heater	Liquid Cooled / Resistance heater
Coolant	Water	Water	Water
Smallest temperature selection step	0.1 °C	0.1 °C	0.1 °C
Chuck temperature display resolution	0.01 °C	0.01 °C	0.01 °C
External touchscreen display operation	Yes	Yes	Yes
Temperature stability	±0.1 °C	±0.1 °C	±0.1 °C
Temperature accuracy	±0.5 °C	±0.5 °C	±0.5 °C
Control method	Low noise DC/PID	Low noise DC/PID	Low noise DC/PID
Interfaces	RS232C	RS232C	RS232C
Optional Interfaces	GP-IB	GP-IB	GP-IB
Chuck surface plating	Nickel	Gold	Gold
Temperature sensor	RTD	RTD	RTD
Temperature uniformity	±0.5 °C at ≤ 200 °C ±1.5 °C at > 200 °C	±0.5 °C at ≤ 100 °C ±2.5 °C at 200 °C	±0.5 °C at ≤ 100 °C ±3.5 °C at 200 °C
Surface flatness	< ±10 μm	< ±8 μm	< ±15μ
Electrical isolation - Coax BNC (m) / SHV Triax	150nA	> 5TΩ	> 5TΩ
Heating Rates	25°C to 300°C < 12 min	25°C to 200°C < 9 min	25°C to 200°C < 28 min
Cooling Rates	300°C to 25°C < 9min	200°C to 25°C < 8min	200°C to 25°C < 8min
Leakage @ 10 V Kelvin Triax	N/A	<25fA	<400fA
Residual Capacitance		<200fF	<1pF
Maximum voltage between chuck top and GND	500V	500V	3kV
3 Safety Circuits	Yes	Yes	Yes
Vacuum Pattern	Rings	Pin hole	Pin hole
Vacuum Zone (DUT Size)	50, 100, 150, 200mm	2, 50, 100, 150, 200mm	2, 50, 100, 150, 200mm

*All data relevant for chucks in ECO mode

System Controller / Dimensions / Weight / Power Consumption

System Model	W x D x H (mm)	Weight (kg)	Weight (Lbs.)	Power cons. (VA)
S-1080	432 x 483 x 267	20.4	45	2000
TC-II	355 x 711 x 610	50.8	112	1500
2XRC-89HL	559 x 610 x 915	135	297	3700

ERS HIGH POWER THERMAL CHUCKS

Specifications of ERS/ SIGNATONE Technology HV 200mm Chucks

Temperature Range	25 °C to 200 °C	25 °C to 300 °C
Connectivity	Kelvin Triax (M),3kV or 10 kV Coaxial	Kelvin Triax (M),3kV or 10 kV Coaxial
Temperature control method	Cooling air / Resistance heater	Cooling air / Resistance heater
Coolant	Air (user supplied)	Air (user supplied)
Smallest temperature selection step	0.1 °C	0.1 °C
Chuck temperature display resolution	0.01 °C	0.01 °C
External touchscreen display (optional)	Yes	Yes
Temperature stability	±0.08 °C	±0.08 °C
Temperature accuracy	±0.1 °C	±0.1 °C
Control method	Low noise DC/PID	Low noise DC/PID
Interfaces	RS232C	RS232C
Chuck surface plating	Gold plated with pinhole surface	Gold plated with pinhole surface
Temperature sensor	Pt100 1/3DIN 4-line wired	Pt100 1/3DIN 4-line wired
Temperature uniformity	< ±0.5 °C at ≤ 200 °C	< ±0.5 °C at ≤ 300 °C
Surface flatness and base parallelism	< ±10 µm	< ±10 µm
Heating and Cooling Rates*	25 to 200°C <30min 200 to 25°C <30min	25 to 300°C <35min 300 to 25°C <35min
Leakage @ 3000V Kelvin Triax (M)		
25°C	5pA	5pA
200 °C	10pA	10pA
300°C	--	15pA
Leakage @ 10kV Coax UHV/SHV (M)		
25°C	6nA	6nA
200 °C	6nA	6nA
300°C	--	6nA
Maximum voltage between chuck top and GND	10 kV DC	10 kV DC

*All data relevant for chucks in ECO mode

System Controller / Chiller Dimensions and Power / Air Consumption

System type	W x D x H (mm)	Weight (kg)	Power cons. (VA)	max. Air flow (l/min)
25 to 200 °C	300 x 360 x 135	12	1300	220
25 to 300 °C	300 x 360 x 135	12	1300	220

❖ MICRO POSITIONER

Choose the Micro Positioner that’s best for your application (more positioner configurations available)

The CheckMate Series probe stations include an Aluminum or Steel Platen for use with Vacuum or Magnetic based micro Positioners

- The **S-926** Series with 100 TPI rectilinear X-Y-Z motion, good for probing down to one micron, at a very competitive price
- The **SP-100** Series with 100 TPI linear X-Y-Z motion with in-line micrometer knobs for high precision probing one-micron features at high magnification – great for use with multi probe applications
- The **SP-150** Series with 100 TPI linear X-Y-Z motion with in-line micrometer knobs for high precision probing sub-micron features at high magnification – great for use with multi probe applications
- The **S-M40** Series RF Positioner with 50 TPI linear X-Y-Z motion with in-line precision knobs for quick and accurate positioning of RF probes – great for use with RF and Wedge probe applications DC-110GHz.
- The **S-M90** Series RF Positioner with 50 TPI linear X-Y-Z motion with precision knobs at 90° for quick and accurate positioning of RF probes – great for use with RF and Wedge probe applications DC-110GHz.
- The **CAP-946** Series Motorized Positioner with Software controlled X-Y Z 20nm resolution. Including 25mm X-Y travel (8mm “Z”) Software, Joys Stick & Thumbwheel Control (excellent for use with Dark box or Gove box applications)



S-926PLM



SP-100PM



SP-150PM



S-M40-MMEW



S-M90-MMEW



CAP-946M

❖ DC PROBE –SELECTION GUIDE

	Coax Probe (C)	Triax Probe (T)	Kelvin Probe (K)
Max voltage	500 V	500 V	500 V
Temperature range	-60 °C to 300 °C	-60 °C to 300 °C	-60 °C to 300 °C
Leakage current	< 50fA	< 20fA	< 20fA
Connectivity	BNC	Standard Triax	SSMC
Connectivity type	Single Coaxial	Single low noise Triaxial	Force/Sense Coax
Characteristics impedance	50 Ohms	50 Ohms	50 Ohms
Residual capacitance	< 80fF	< 80fF	< 80fF
Probe holder material	Brass	Brass	Brass
Probe tips material	Tungsten	Tungsten	Tungsten
Probe tips sizes	0.5 µm – 25 µm	0.5 µm – 25 µm	0.5 µm – 25 µm
Minimum pad size	25 µm x 25 µm	25 µm x 25 µm	25 µm x 25 µm



Coax Probe



Triax Probe



Coax Kelvin Probe

❖ High Voltage/High Current PROBE –SELECTION

Model	High Voltage Probes			High Current Probe
	HVP-CX-3	HVP-TX-3	HVP-CX-10	HCP 100
Max Voltage	3 kV	3 kV	10 kV	500 V
Max Current	1 A DC/30 A Pulsed	120 mA DC	20 mA DC	10 A DC/100 A Pulsed
Temperature Range	-60 °C to 300 °C	-60 °C to 300 °C	-60 °C to 300 °C	-60 °C to 300 °C
Leakage Current	< 200 pA @ 3 kV, < 5 pA @ 10 V	< 1 pA @ 3 kV, < 100 fA @ 10 V	< 100 pA @ 10 kV	N/A
Connector Type	SHV	HV Triax	UHV Coax	HV Banana
Replaceable Tip	Yes	Yes	Yes	Yes
Probe Material	W	W	W	BeCu or W



HVP-CX-3



HVP-TX-3



HVP-CX-10



HCP-100

*All leakage tests conducted in an enclosed environment with Keithley 4200, or equivalent, in sampling mode with 10 PLC, auto-ranging. 0.25s interval

❖ SYSTEM OPTIONS – ACCESSORIES

Probe Station Dark Box (PSDB-CM)

Probe Station light tight, electrically shielded enclosure
Excellent for use in conjunction with the following:

- Low-Leakage measurements
- High-Power measurements
- Thermal measurements
- Light-Sensitive measurements

Door and Panel interlock options are typically used for High Voltage and High Temperature safety



PSDB-CM

Probe Card Adapter (S-4710)

For use with 4.5" wide probe cards




S-4710

CM-BMVC

Board Mount Vice Chuck

The CheckMate Series probe stations supports the 200mm x 200mm adjustable Vice chuck

- For clamping various size and shaped devices, packaged parts, PCB's, single chips, MEMS, BioMEMS or virtually anything you want to hold view and probe
(VICE Clamps are non-conductive ULTEM)




CM-BMVC

M-VAC


AC Linear Piston – (Small) Quiet Vacuum Pump

Supports vacuum hold-down of DUT and mounting of 1-10 Micro-positioners
(11 in. Hg @ 115VAC /428 mbar @ 230V AC)

- Includes Power Cord, On/Off Switch, 10' flexible vacuum tubing, 5Amp Fuse, Vibration dampening feet, Easy grip handle



Front



Back



M-VAC

❖ **SYSTEM DIMENSIONS – TABLE OPTIONAL**

CM-170 / including microscope*

Dimensions (L x D x H)	660x 889 x 610mm	(26" x 35" x 24")
Weight	100kg	(220.5 lbs.)

* Can vary dependent on microscope selection


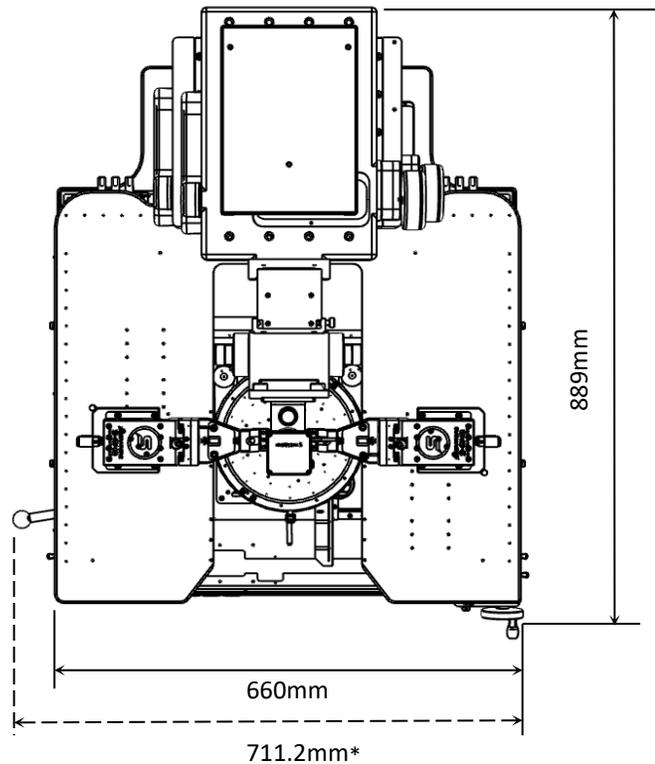
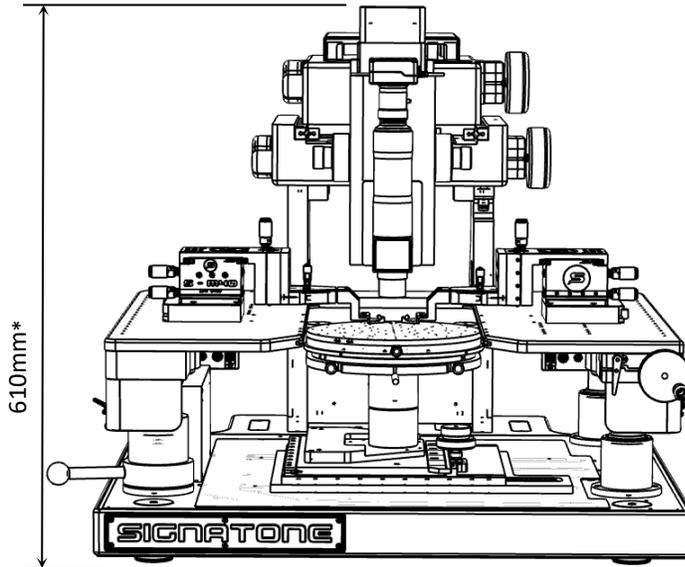


❖ **SYSTEM DIMENSIONS INCLUDING TABLE**

CM -170 / Vibration Isolation Table /Monitor Mount

Dimensions (L x D x H)	863x 1085 x 1370 mm	(34 x 42.7 x 53.95 In)
Weight	385 kg	(849 lbs.)


* Can vary dependent on monitor, Microscope selection and position

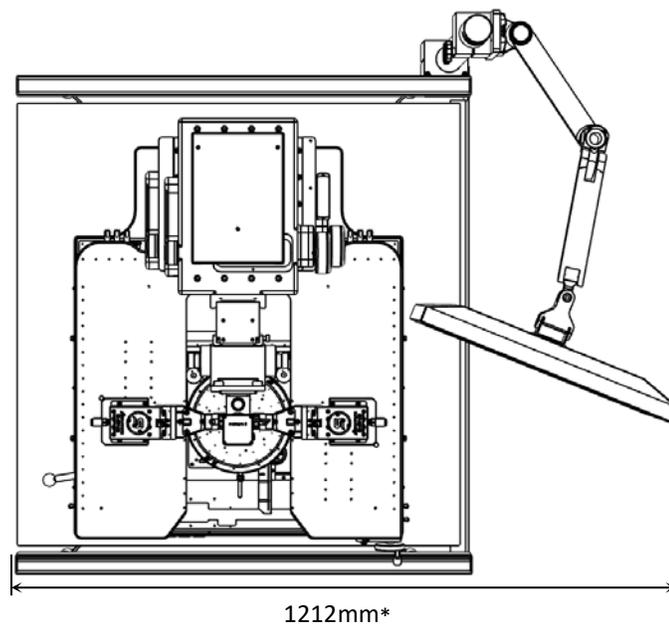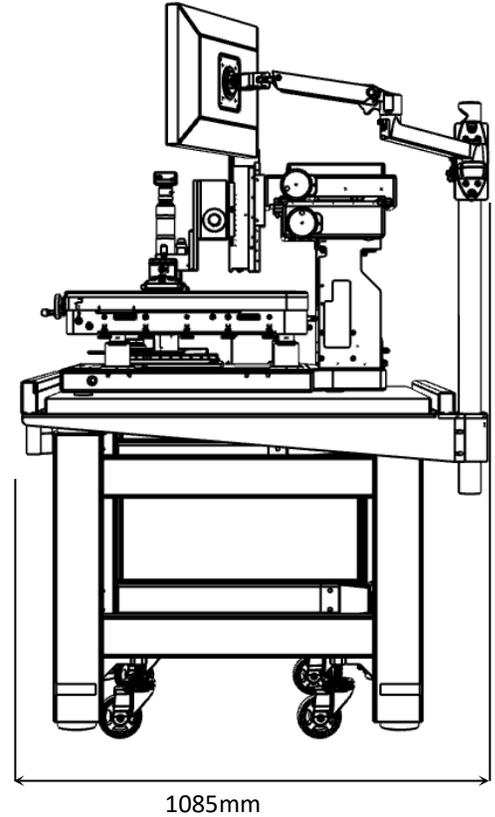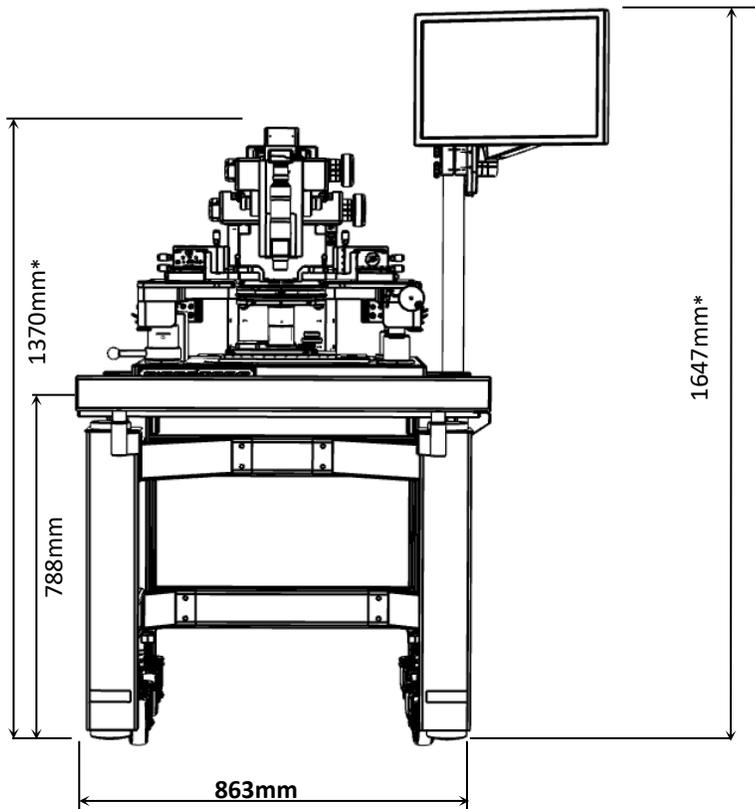

❖ WARRANTY

- Standard Warranty 12 months *
- For Extended Warranty and Service Contracts : Contact Signatone Corp. for more information

* See Signatone Corporate Terms and Conditions of Sale for further details.

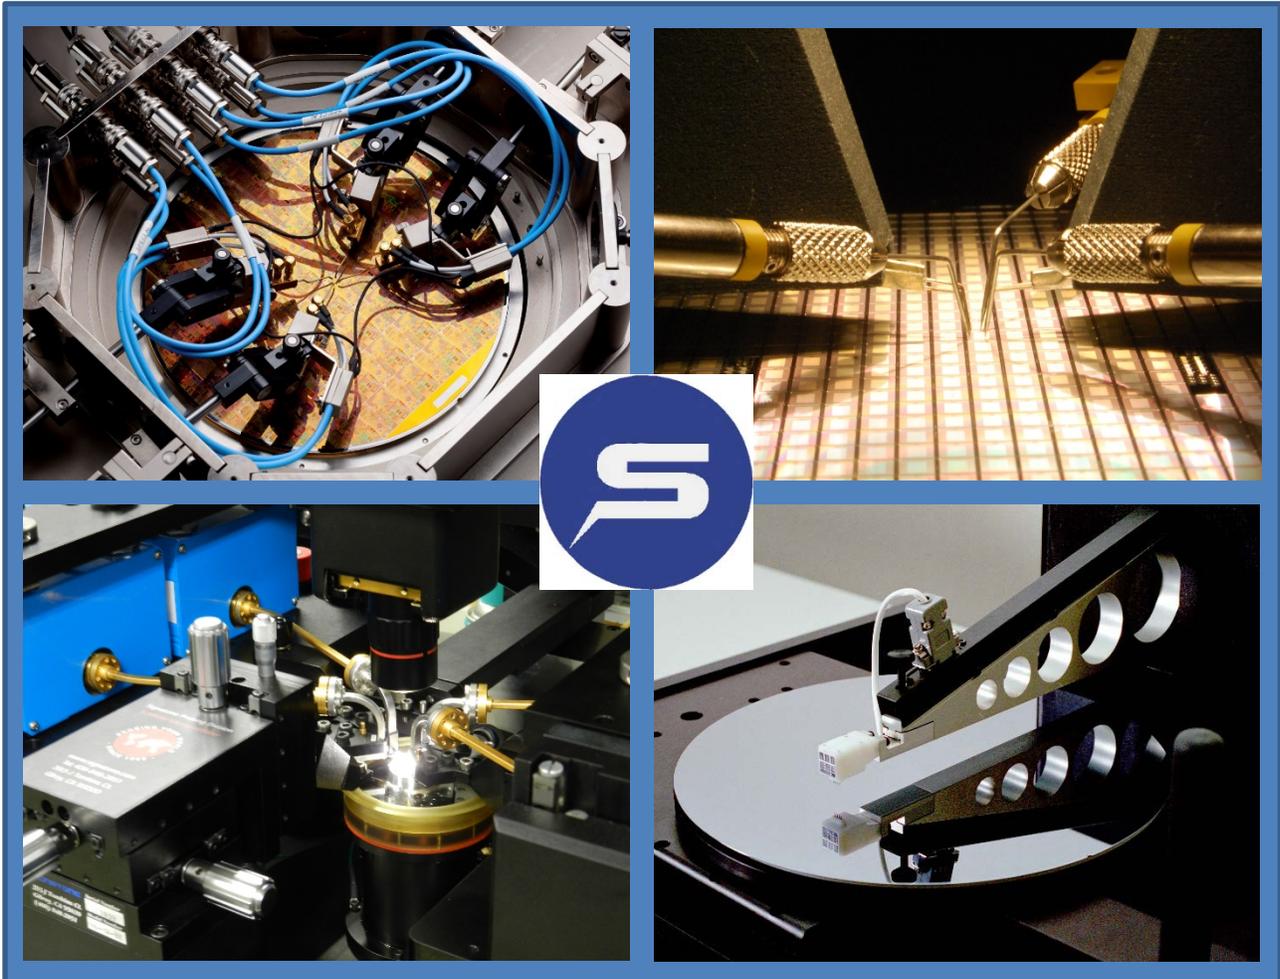

GRENOBLE - FRANCE

Tel : +33 (0)4 76 56 16 17

Email : contact@microworld.eu

www.microworld.eu